




SEAM SEALED SMD CRYSTAL 6.0×3.5mm

FEATURES

- Leadless type
- Reflow soldering
- It is a completely type with a metal case sealed on a ceramic board
- Miniature package

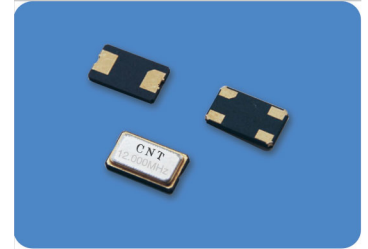


SPECIFICATIONS

ITEM	DESCRIPTION
Frequency range	8.000000MHz~100.000000MHz
Frequency Tolerance (at 25°C)	±30ppm (STD)、±5ppm ~ ±50ppm or specify
Operating Temperature Range	-10°C~+60°C、-20°C~+70°C、-40°C~+85°C or specify
Frequency Stability Over Operating Temp Characteristics	±30ppm (STD)、±10ppm ~ ±50ppm or specify
Equivalent Series Resistance	see table No.1
Storage Temperature Range	-55°C ~ +125°C
Shunt Capacitance (Co)	5.0pF Max
Load Capacitance (CL)	series 16pF、20pF、30pF、32pF or specify
Drive Level	10uw~100uw
Insulation Resistance	500M ohms Min / DC 100V
Aging	±3ppm/year

EQUIVALENT SERIES RESISTANCE (ESR) TABLE No. 1

Frequency Range	Mode	ESR (Ω)	Frequency Range	Mode	ESR (Ω)
8.000MHz~9.999MHz	Fundamental	70Max	35.000MHz~39.999MHz	3rd Overtone	100Max
10.000MHz~13.999MHz	Fundamental	60Max	40.000MHz~44.999MHz	3rd Overtone	80Max
14.000MHz~30.000MHz	Fundamental	40Max	45.000MHz~80.000MHz	3rd Overtone	60Max

OUTLINE DIMENSIONS (mm)

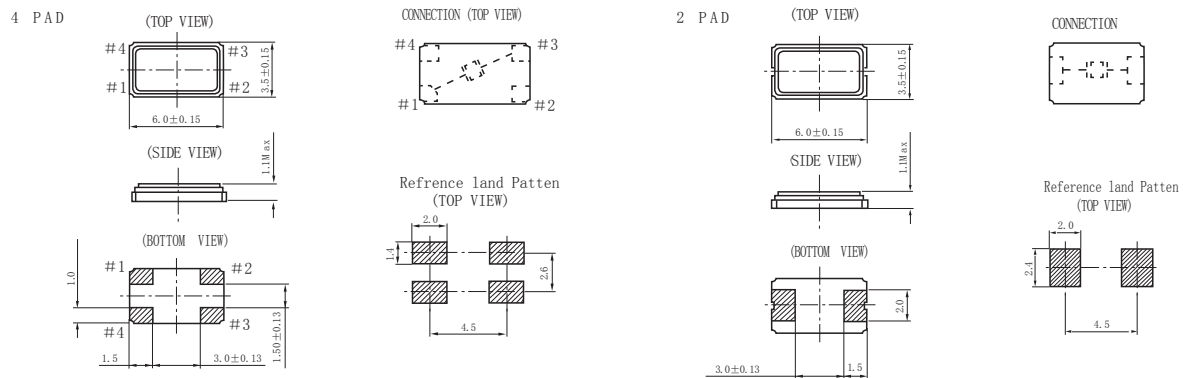

PART NUMBER

TIM-	XS6035	F	16.000000	±20	±30	-20°C~+70°C	20	40
Type	oscillator mode	Frequency (MHz)	Frequency tolerance (ppm)	temperature stability (ppm)	operating temperature range	Load capacitance (pf)	ESR (Ω) Max	
XS6035A: 4PAD	F: Fundamental	16.000000:	±20: ±20ppm	±30: ±30ppm		20: 20pf		
XS6035B: 2PAD	3: 3rd Overtone	16.000000MHz				00: SERIES	40: 40 Ω Max	